

Optolock series POF adapters

Description:

The Optolock series adapters are designed for direct connection of POF – Plastic Optical Fibers. Refer to advanced design the Optolock is able to connect duplex plastic fibers without need of their termination. For connection - only cut POF fiber and simply insert into adapters.

The Optolock adapters are offered for 1.5 and 2.2 mm outer diameter POF fiber.



Features:

- Duplex POF adapter
- Direct connection of two fibers without termination
- Insertion loss 1 – 2 dB



Application:

- POF Networks
- FTTH projects

Ordering code:

A – OL1 duplex adapter for 1.5 mm cable
A – OL2 duplex adapter for 2.2 mm cable

Dimensions:

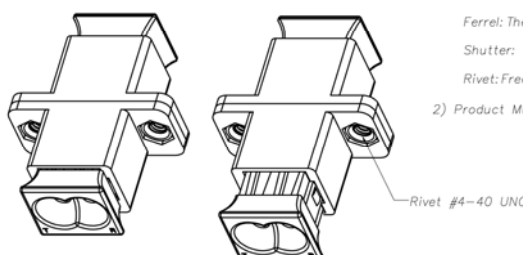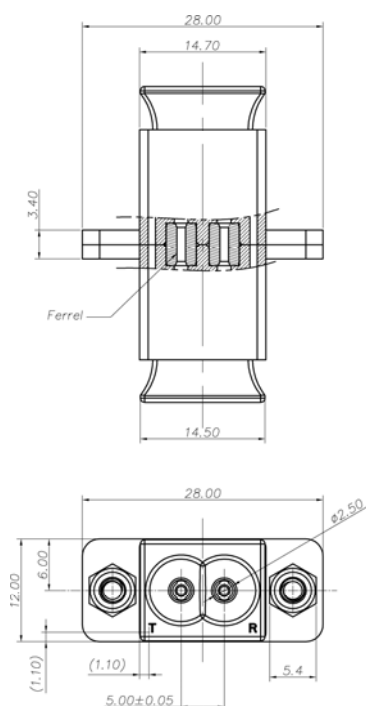

Notes:
1) Material :
Outer Housing: Thermoplastic 30%G.F.Black.UL94V-0
Ferrel: Thermoplastic 30%G.F. Black. UL94V-0
Shutter: Thermoplastic 30%G.F.Black. UL94V-0
Rivet: Free-Cutting Copper
2) Product Must Conform to RoHS.

