


FTTx Flat Drop Cable (GSW)

Easy-strippable Access Drop Cable for simple installation.

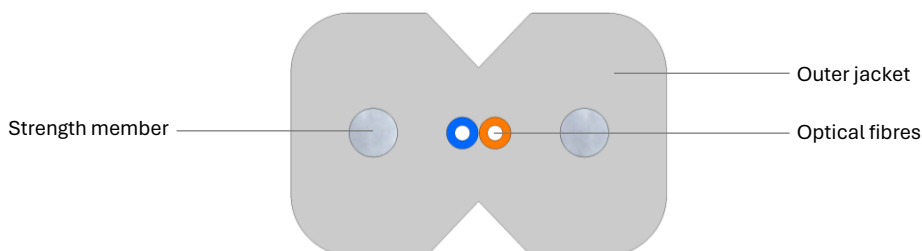

Fibre Type	G.657.A1, G.657.A2
Fibre colour	Blue, Orange
Strength member	Steel wire
Outer jacket	UV resistant Halogen-free flame-retardant thermoplastic compound

Number of Fibres	1	2	4
Nominal outer diameter (mm)		3.1 x 2.0	
Calc. cable weight (kg/km)	9.6	9.7	9.8
Short-term tensile strength (N)		150	IEC 60794-1-101
Long-term tensile strength (N)		45	IEC 60794-1-101
Crush resistance (N/100 mm)		1000	IEC 60794-1-103
Max. impact loading (Nm)		2	IEC 60794-1-104
Min. bend radius not load (OD)		15	IEC 60794-1-111
Min. bend radius load (OD)		20	IEC 60794-1-111
Operating temperature range (°C)		-20 to +60	IEC 60794-1-201
Storage temperature range (°C)		-20 to +60	IEC 60794-1-201
Installation temperature range (°C)		-5 to +50	IEC 60794-1-201
Class of fire reaction		Eca	EN 50575, EN 13501-6

Number of Fibers	Cable Code (Ordering Code)	Delivery length, Packing
1	OPK-U-DRPM-1(1×0.25)FFZH-xx-yy	1000 m ± 5% (Reel in a Box) or 2100 m ± 5% Plywood reel
2	OPK-U-DRPM-2(2×0.25)FFZH-xx-yy	1000 m ± 5% (Reel in a Box) or 2100 m ± 5% Plywood reel
4	OPK-U-DRPM-4(4×0.25)FFZH-xx-yy	1000 m ± 5% (Reel in a Box) or 2100 m ± 5% Plywood reel

xx – fibre type (see Cable code datasheet), yy – jacket color

Print legend: Manufacturer - Cable type – lot number- length marking per 1 m

(customer print legend available on request)